


LOW PRESSURE MEMBRANE ACCUMULATORS TYPE ELM

Non reparable - 0,075 ÷ 2 lt Volume

TECHNICAL DATA STANDARD EXECUTION

Construction	Vulcanized metallic plate accumulators, welded stainless body, gas screw loaded. NOT REPARABLE
Working pressure	100 ÷ 250 bar
Compatible fluids	Hydraulic oil (mineral oil). Other fluids on demand.
Mounting	Like your preference. Consider a space of approx. 200 mm for of charging kit type VGU over the inlet gas screw valve.
Temperature	-15 ÷ 80 °C (standard membrane)
Certifications	PED "Ce"
Special executions	On demand

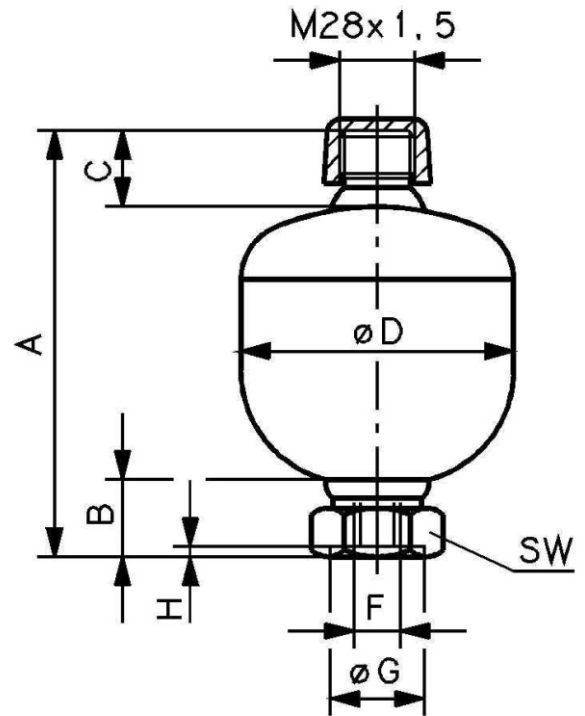

Model	Volume lt	Max pressure bar	Temp. °C	Weigh kg	A mm	B mm	C mm	D mm	F GAS	G mm	H mm	SW mm	T min
ELM 0,075/250	0,075	250	-15 ÷ 80	0,7	111	20	10	64	G 1/2"	29	0,5	32	14
ELM 0,16/250	0,1,6	250	-15 ÷ 80	1,0	120	20	10	75	G 1/2"	29	0,5	32	14
ELM 0,32/210	0,32	210	-15 ÷ 80	1,7	140	20	10	95	G 1/2"	29	0,5	32	14
ELM 0,50/210	0,50	210	-15 ÷ 80	2,0	152	22	10	106	G 1/2"	34	0,5	41	14
ELM 0,75/200	0,75	210	-15 ÷ 80	2,9	159	22	10	123	G 1/2"	34	0,5	41	14
ELM 1/200	1,0	200	-15 ÷ 80	3,5	180	22	10	136	G 1/2"	34	0,5	41	14
ELM 1,4/140	1,4	140	-15 ÷ 80	4,2	191	22	10	147	G 1/2"	34	0,5	41	14
ELM 2/140	2,0	100	-15 ÷ 80	3,5	240	22	10	196	G 1/2"	34	0,5	41	14
ELM 2,8/250	2,8	250	-15 ÷ 80	9	268	21	22	174	G 3/4"	32	0,5	41	14

CHARGING KIT TYPE VGU

Description

The universal charging kit has been designed for fit any brand of accumulators on the market upon maximum pressure of 345 bar.

