

REGOLABLE FLOW INDICATORS TYPE IFE

Water - Clean fluids - in line mounting - Vertical fastening - Fluid inlet Down⇒Top

TECHNICAL DATA

Fluids	Water and clean fluids
Max. Pressure	50 bar
Temperature	-10÷80 °C
Contact	Normally Open (without fluid)
Max. Voltage	220 V 50 Hz
Electrical protection	IP65 with PG9 DIN 43650 connector
Threads	1/8" Gas to 1" Gas Female
Weight	215 to 1570 gr
Mounting	Verticale flow, down⇒Top inlet

EXPLANATION CODE


TYPE

IFE	In line Flow Electrical indicators, 1 N.O. switches
IF2E	In line Flow Electrical indicators, 2 N.O. switches


SIZE / H₂O FLOWS

1	0,3 ÷ 3 lt/min
2	1 ÷ 9 lt/min
3	2 ÷ 18 lt/min
4	3 ÷ 24 lt/min
5	6 ÷ 35 lt/min
6	15 ÷ 60 lt/min

ORDERING CODE

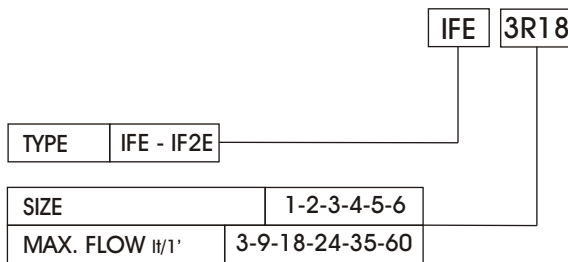

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (GAS)	CH
IFE1R3	60	20	13,5	89	1/8"	15
IFE2R9	62	22	13,5	93	1/4"	17
IFE3R18	64	24	15,5	104	3/8"	20
IFE4R24	68	28	18,5	115	1/2"	24
IFE5R35	72	32	22,5	132	3/4"	32
IFE6R60	85	45	24,5	157	1"	40

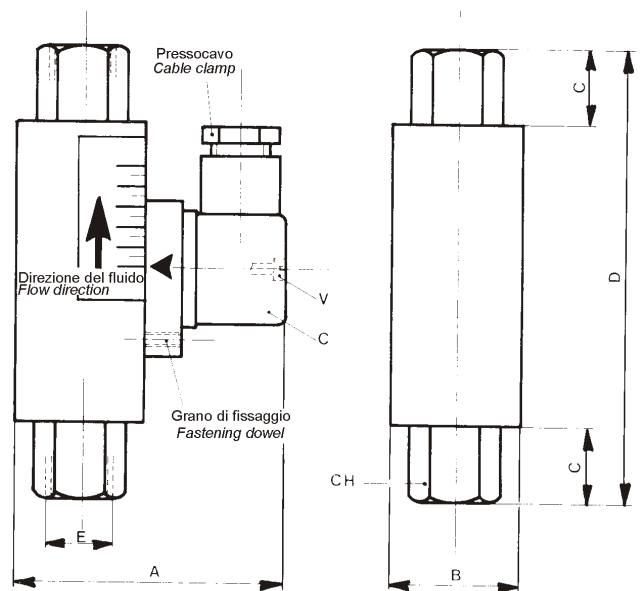

Model	A (mm)	B (mm)	C (mm)	D (GAS)	CH
IF2E1R3	89	20	13,5	1/8"	15
IF2E2R9	93	22	13,5	1/4"	17
IF2E3R18	104	24	15,5	3/8"	20
IF2E4R24	115	28	18,5	1/2"	24
IF2E5R35	132	32	22,5	3/4"	32
IF2E6R60	157	45	24,5	1"	40

