


IMPELLER FLOW INDICATOR TYPE CFV


Water - cleaned fluids - In-line mounting - Vertical flow rate Bottom⇒Top

TECHNICAL SPECIFICATIONS

Fluids	Water, Cleaned fluids
Temperature	-40 ÷ 85 °C
Threads	Process 1/4" Gas Female up to 1" Gas Female
Weight	From 123 up to 572 gr
Mounting	Favored Vertical flow rate Bottom / Top

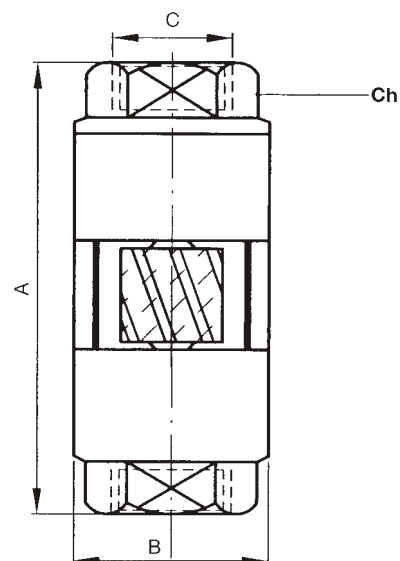

ORDERING CODE

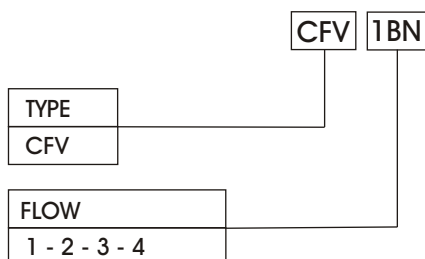

EXPLANATION CODE

TYPE	
CFV	Impeller flow indicator
FLOW H₂O	
1BN	1 ÷ 10 lt/min
2BN	2 ÷ 20 lt/min
3BN	3 ÷ 30 lt/min
4BN	4 ÷ 40 lt/min
5BN	6 ÷ 60 lt/min

Model	A (mm)	B (mm)	C (GAS)	Max Pressure bar	CH
CFV1BN	59	25	1/4"	10	19
CFV2BN	71	30	3/8"	8	24
CFV3BN	71	30	1/2"	8	24
CFV4BN	106	47	3/4"	5	40
CFV5BN	106	47	1"	5	40