

LEVEL SWITCHES ON/OFF TYPE LM/LMM...A

M18x1,5 Thread - Brass/NBR materials - N.O. - N.C. (Reversible) - SPDT Contact


TECHNICAL DATA STANDARD EXECUTION

Fluido viscosity	150 cSt
Max pressure	10 bar
Working temperature	-10...+80 °C
Mounting	Verticale
Max inclination	15 °
Commutated power CC	60 W (NO-NC), 30 W (SPDT)
Commutated power CA	60 VA
Max Voltage	~220 V 50 Hz
Resistive max current	0,8 A (NO-NC), 0,5 A (SPDT)
A protection circuit or relay is to be used for electrical inductive load	
Contact	NO-NC, SPDT
Open contact capacity	0,6 pF (NO-NC), 2 pF (SPDT)
Contact insulation resistance	10 ¹⁰ ohm (NO-NC), 10 ⁹ ohm (SPDT)
Protection	IP 65, PG 9 Connector DIN 43650

MATERIALS

Flange	Anodized Aluminium
Shaft	Brass
Spring and stop rings	Bronze
Floats	NBR expanded resin

ORDERING CODE

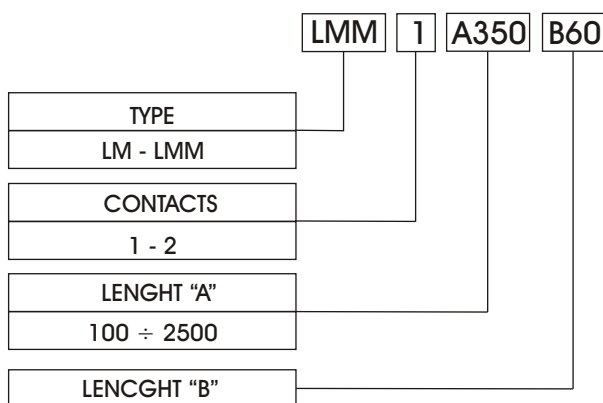

EXPLANATION CODE

TYPE
LM Level switches Minimum (LM) - Minimum/maximum (LMM)

CONTACTS
1 NC (standard), NO (on request) Reversible
2 SPDT


THREADS M18 x 1,5

LENGHT "A"
A 100 mm, minimum quote for Minimum level model only
200 mm minimum quote for Minimum/maximum model
2500 mm maximum quote for every model
Standard Lenght for all model up to 500 mm with distance of 50 mm. For different dimensions put the interested quoteb after "A"

LENGHT "B"
B Referred to maximum contact quote for LMM model
Standard 60 mm for A 200, 250, 300, 350.
70 mm for A 400, 450.
80 mm for A 500 and upper

On request different lenght from those indicated in the reference table can be supplied

LM1/2A...

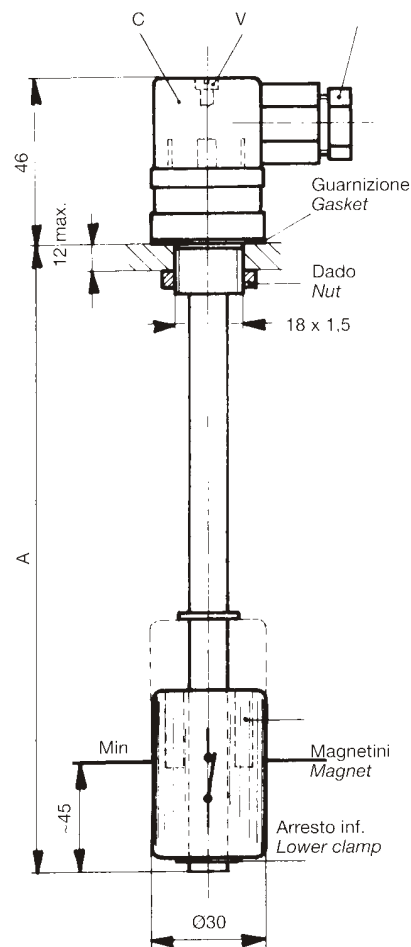

LMM1/2FA

