

LEVEL SWITCHES ON/OFF TYPE LM3/4GSIA...

G 3/8" Male Thread - Stainless Steel material - N.C. Contact option N.O - SPDT - Free Leads


TECHNICAL DATA STANDARD EXECUTION

Fluido viscosity	150 cSt
Max pressure	10 bar
Working temperature	-10...+80 °C
Mounting	Verticale
Max inclination	15 °
Commutated power CC	60 W (NO-NC), 30 W (SPDT)
Commutated power CA	60 VA
Max Voltage	~220 V 50 Hz
Resistive max current	0,8 A (NO-NC), 0,5 A (SPDT)
A protection circuit or relay is to be used for electrical inductive load	
Contact	NO-NC, SPDT
Open contact capacity	0,6 pF (NO-NC), 2 pF (SPDT)
Contact insulation resistance	10 ¹⁰ ohm (NO-NC), 10 ⁹ ohm (SPDT)
Protection	IP 65, PG 9 Connector DIN 43650

MATERIALS

Flange, shaft, Stop ring	Stainless Steel
Floats	Stainless Steel

ORDERING CODE

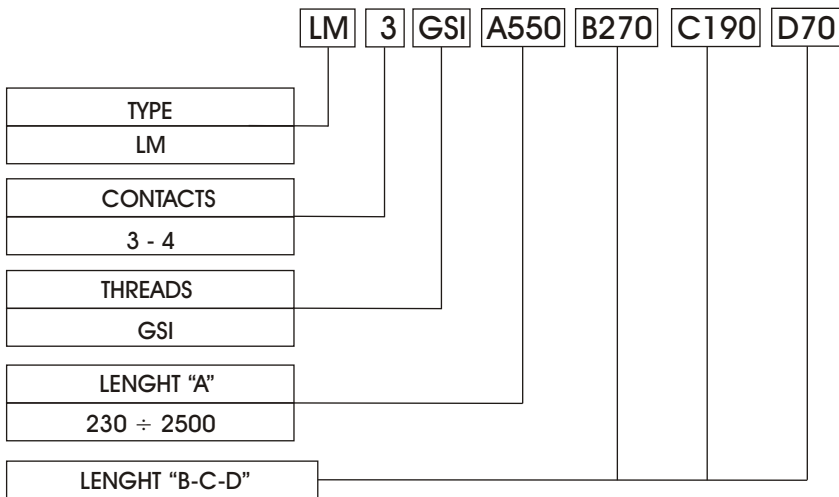

EXPLANATION CODE

TYPE	
LM3/4	Livel switches 3/4 point-action
CONTACTS	
N°3/4	Contatcts NC (standard), NA or SPDT on request
THREADS	
GSI	Stainless Steel Threads G 3/8" Male with free leads L=500 mm
LENGHT "A, B, C, D"	
Indicated the quote of interested point acting up to a maximum "A" quote of 2500 mm.	
Minimum distance from contacts B, C, D = 90 mm.	
The nearest quote to the thread always be upper or equal to 50 mm.	

