

LEVEL SWITCHES ON/OFF TYPE LM3/4GTIA...

Threads G 2" Male - Stainless Steel materials - N.C. Conatc option N.O - SPDT


TECHNICAL DATA STANDARD EXECUTION

Fluido viscosity	150 cSt
Max pressure	10 bar
Working temperature	-10...+80 °C
Mounting	Verticale
Max inclination	15 °
Commutated power CC	60 W (NO-NC), 30 W (SPDT)
Commutated power CA	60 VA
Max Voltage	~220 V 50 Hz
Resistive max current	0,8 A (NO-NC), 0,5 A (SPDT)
A protection circuit or relay is to be used for electrical inductive load	
Contact	NO-NC, SPDT
Open contact capacity	0,6 pF (NO-NC), 2 pF (SPDT)
Contact insulation resistance	10 ¹⁰ ohm (NO-NC), 10 ⁹ ohm (SPDT)
Protection	IP 65, PG 9 Connector DIN 43650

MATERIALS

Flange, shaft, Stop ring	Stainless Steel
Floats	Stainless Steel

ORDERING CODE

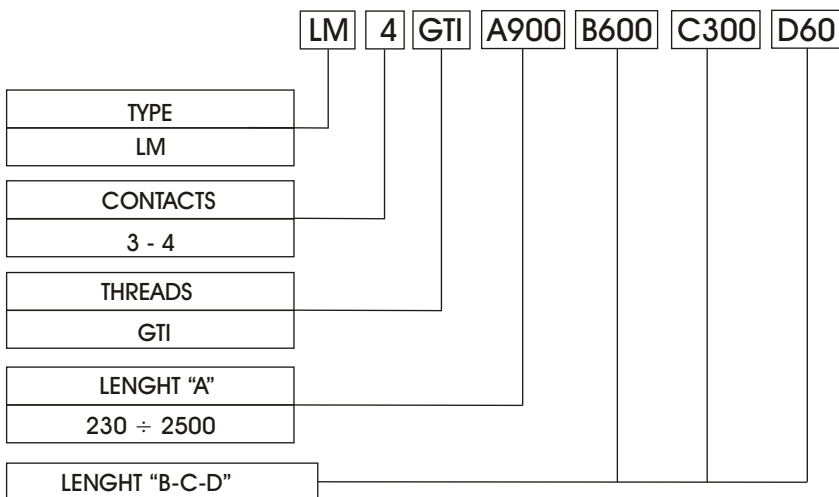

EXPLANATION CODE

TYPE

LM3/4 Level switches 3/4 point-action

CONTACTS

N° 3/4 Contacts NC (standard), NO or SPDT on request if different to the (NC) standard, always indicate the type of needed contact after every quote.

THREAD

GTI Stainless Steel Thread G 2" Male with cable conduit box


LENGHT "A, B, C, D"

Indicated the quote of interested point acting up to a maximum "A" quote of 2500 mm.
Minimum distance from contacts B, C, D = 90 mm.
The nearest quote to the thread always be upper or equal to 50 mm.

OPTIONS

S High temperature Silicon cable

LM3GTIA...B...C...

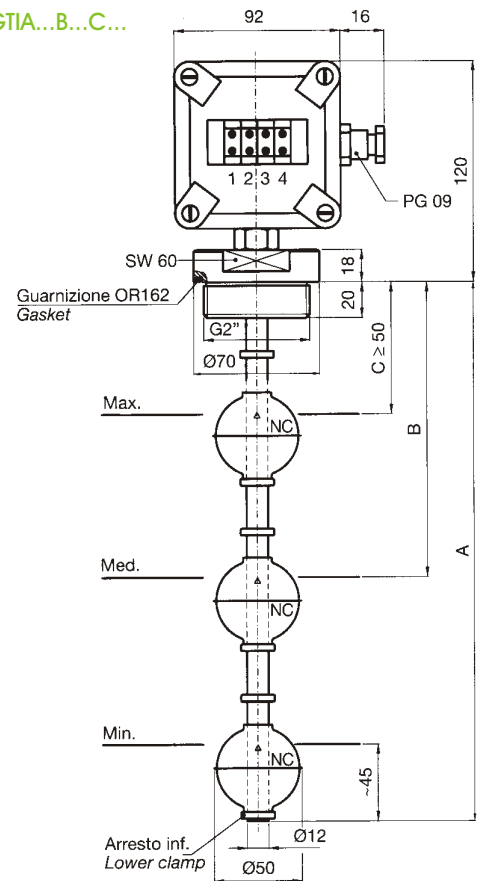

LM4GTIA...B...C...D...

