



# BIMETALLIC THERMOSTAT TYPE TRM.204

Range 40°C ÷ 130°C - Max voltage 230 V - Normally Open or Closed contact

TRM.S1

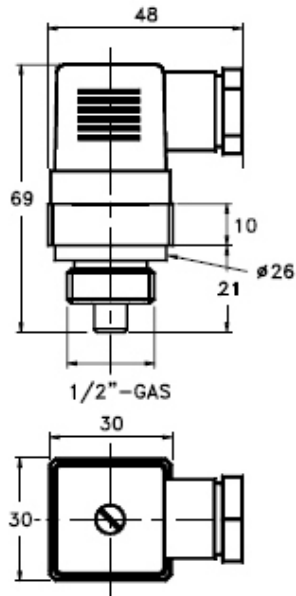

TRM.S3

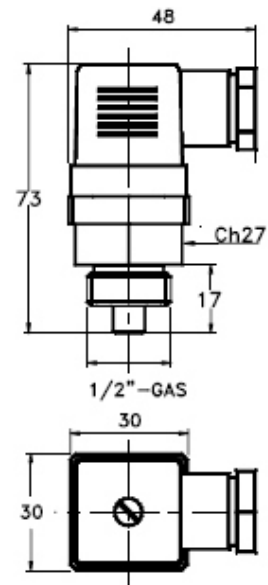

## TECHNICAL DATA STANDARD EXECUTION

Max. voltage	230 Vca
Contact	Normally Open or Closed
Current	10 A
Hysteresis	10 °C ± 4 °C
Accuracy	± 3 °C
Max. temperature	+ 50 °C on set point value
Max. pressure	100 bar
Protection	IP 65

## CODE EXPLANATION

<b>TYPE</b>	
TRM.204	Fixed bimetallic thermostat
<b>RANGE</b>	
040	40 °C
050	50 °C
060	60 °C
070	70 °C
080	80 °C
090	90 °C
100	100 °C
110	110 °C
120	120 °C
130	130 °C

## CONNECTIONS

15	1/2"
22K	M22x1,5 (on demand)
20	3/4" (on demand)

## THREADS

G	UNI 228/1
C	UNI 7/1 (on demand)
N	NPT (on demand)

## MATERIALS

O	Brass
S	Staniless Steel (on demand)

## ELECTRICAL COTACTS (at no working)

1	Normally Open
2	Normally Closed

## ELECTRICAL OUTPUT

S1	DIN 43650A
S3	DIN43650A turn plug

## ORDERING CODE

TRM.204 070 15GO 2 S1

