

CHECK VALVE BALL TYPE FT 260/6

In line mounting - Work pressure 350 bar - Temperature -20° + 100 °C

FT 260/6

These check valves have a guided ball giving a metal to metal seat.

They are used for working pressures up to 350 bar.

They may be supplied with two springs (0.35 standard and 4.5 bar)

On request


- Version AISI 316 stainless steel code FT 2260/6.

MATERIAL STANDARD EXECUTION

Body	9 S Mn Pb 23 - UNI 5105
Spring	AISI 302
Ball	UNI 100 C 6
Ball guide	Nylon 66 + fibra carbonio

EXEMPLE FOR ORDERING

	Code	Type
Stainless	FT 260/6	14
St. Steel	FT 2260/6	34

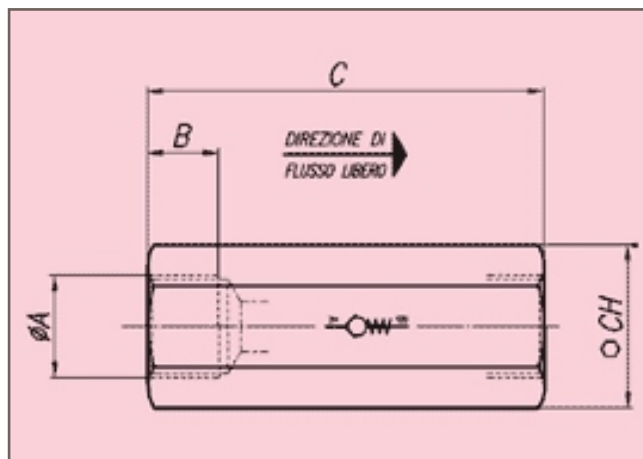

Type	A	B	C	CH	Pressure bar	Weight Kg
18	G1/8"	8,5	41	16	350	0,054
14	G1/4"	12,5	54	19	350	0,089
38	G3/8"	13	65	24	350	0,175
12	G1/2"	16	77	30	350	0,310
34	G3/4"	20	88	36	350	0,450
100	G1"	23	108,5	46	350	0,965

